

SMD245

Surface Mount Resistor

Issue 1.0 October 2011


Units 1 - 2, Tanfield Lea South Industrial Estate,
 Stanley, Co Durham DH9 9XA
 Telephone : + 44 (0) 1207 230 728 Fax : + 44 (0) 1207 281 860
 EMail : sales@tsec.ltd.uk WEB : www.tsec.ltd.uk

TSEC manufacture a range of SMD resistor networks which cover a wide range of resistances and a selection of TCR's. Any nominal resistance in each range may be manufactured to low absolute and ratio tolerances .
 The SMD resistor networks are designed to be Flip chip mounted but they may also be Aluminium wire bonded.

Summary

- High reliability thick film technology.
- 1 banks of 10x Resistors
- 2 banks of 7x Resistors
- Common terminations
- Maximum power dissipation 250mW / resistor

Typical Layout

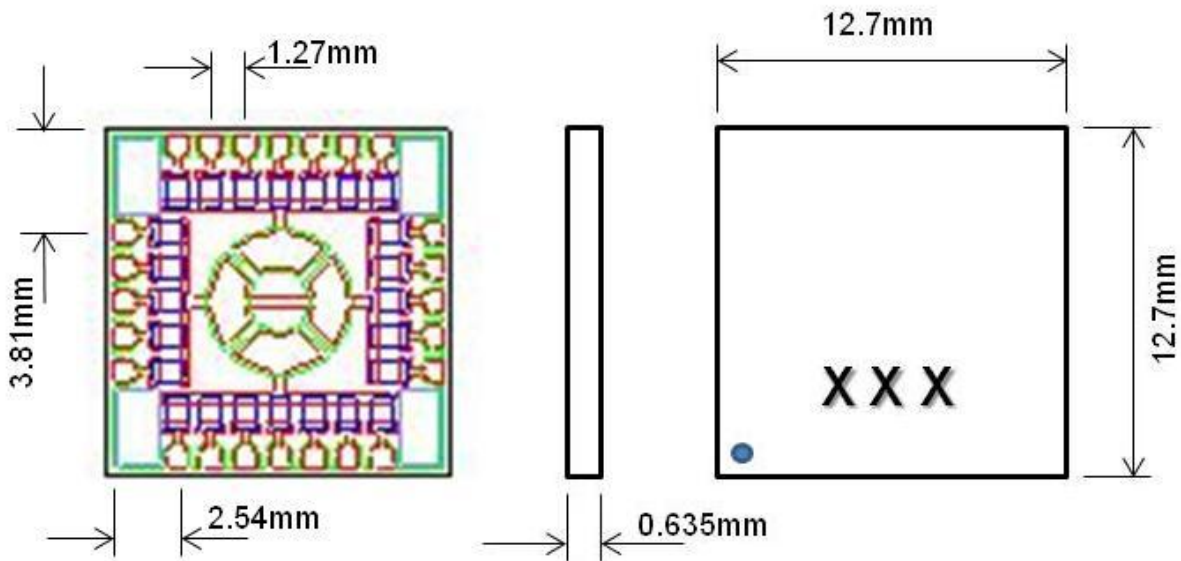

Electrical Specification

Resistor range	1R ... 100M ±1% Absolute ±0.1% Ratio match
Maximum power dissipation	250mW each resistor
TCR	±100ppm/°C, ±50ppm/°C, ±25ppm/°C
Maximum voltage	100VAC / 100VDC
Operating temperature range	-25°C 125°C
Derating	Linearly from rated dissipation at 125°C to zero at 125°C
Load stability Dr	<1% 1000hrs @ Rated Power Dissipation
Termination	Ball Grid Array Conductor pads
Protection	Overglaze only

TSEC reserves the right to change specifications on these products without the explicit need to notify customers.